


igus®

Item	PART NO.	DESCRIPTION
1	B-1564	Outer cover
2	B-1609	Metal washer 2mm
3	B-2081	Rubber gasket
4	BC-746A	Flange washer 2mm
5	BC-1234	Slide washer 8mm
6	M-200	Slide bushing 48mm
7	M-200C	Slide bushing 42mm

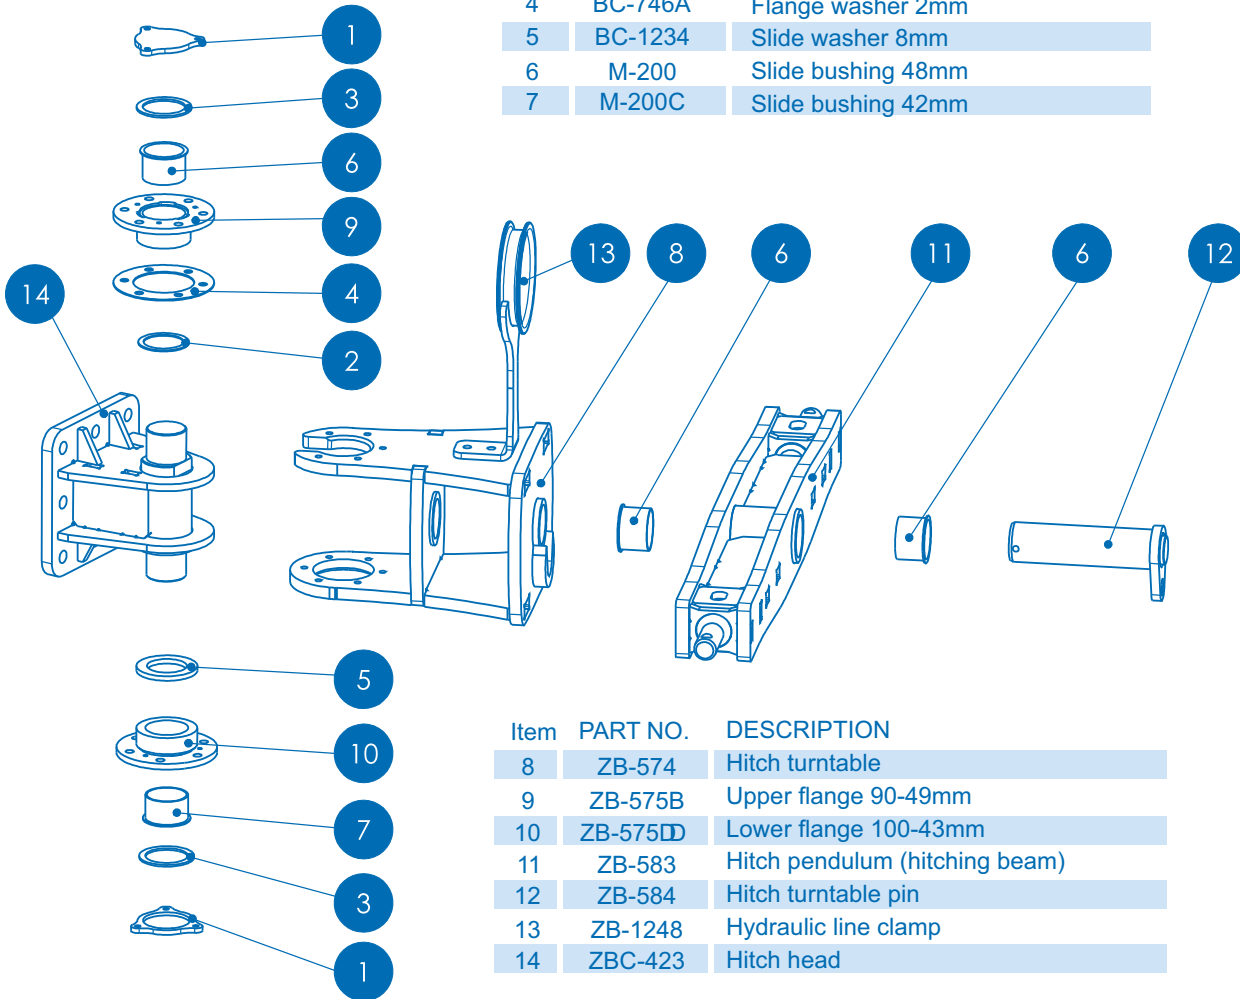

Item	PART NO.	DESCRIPTION
8	ZB-574	Hitch turntable
9	ZB-575B	Upper flange 90-49mm
10	ZB-575D	Lower flange 100-43mm
11	ZB-583	Hitch pendulum (hitching beam)
12	ZB-584	Hitch turntable pin
13	ZB-1248	Hydraulic line clamp
14	ZBC-423	Hitch head

*) when ordering, please refer to the part catalogue number.



The operating elements are identical for the 3 and 4 hitch categories.

The universal hitching system concept for trailed machines was applied in all ROLMAKO tillage machines. The modern drawbar construction made of structural steel, elements of highly durable plastic and bronze allows for operation without the application of lubricants. All elements are always well fitted with one another. Maintenance procedures are only limited to controlling the clearance between friction surfaces and checking screw connections. Worn out plastic and bronze elements should be replaced with new ones. The drawbar can be subjected to multiple smooth regeneration by easy replacement of wearing elements, without the need to replace costly components of the machine hitch.

